

**Not recommended for new designs**

Series connection parts of film capacitor and resistor  
For surge absorber

**Metallized PET film capacitor  
+ Resistor**

★ Performance

Item	Performance
Temperature range	-40~ +85°C
Rated Voltage (U <sub>R</sub> )	125VAC, 250VAC
Capacitance range	0.033μF, 0.1 μF
Resistor range	120 Ω
Capacitance tolerance	± 20%
Resistor tolerance	± 20%
Insulation resistance (IR)	≥ 2000 MΩ (500 VDC for 1min)




★ Standard dimensions table (CR)

Part code	Capacitor		Resistor		Dimensions (mm)					
	Rated voltage (VAC)	Capacitance (μF)	Resistance (Ω)	Power Rated (W)	A max	B max	L max	P ±2.0	φ d1	φ d2
CR2B104C121	125	0.1	120	1/4	7.0	13.5	14.5	10.0	0.6	0.6
CR2E333C121	250	0.033	120	1/2	8.0	17.0	16.5	10.0	0.7	0.6
CR2E104C121	250	0.1	120	1/2	8.0	20.0	21.0	15.0	0.7	0.6

Please contact us for products with different C constants and R constants.

Please contact us for the dimensions and shape for taping products.

■ Component outline

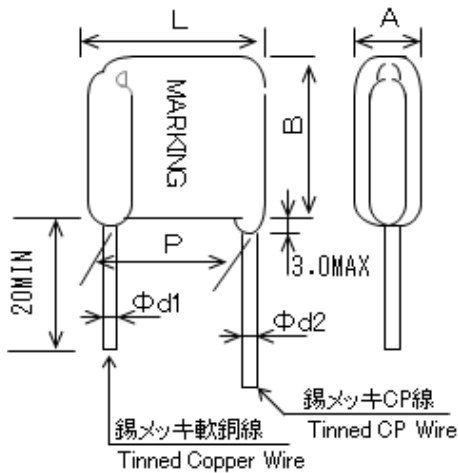

■ Equivalent circuit

